



PEAK

**50/50 PREDILUTED
ANTIFREEZE
+ COOLANT**

**GLOBAL
LIFETIME**



DESCRIPTION:

PEAK® Global LifeTime™ 50/50 Prediluted Antifreeze + Coolant features a patented, advanced organic acid technology that provides guaranteed lifetime protection – for as long as you own your vehicle!* Its patented inhibitors will provide maximum protection against damaging rust and corrosion in all automobiles and light-duty trucks worldwide, regardless of make, model, year or original antifreeze color.

BENEFITS:

- Provides guaranteed lifetime protection for as long as you own your vehicle when a complete cooling system flush and fill is performed and specified maintenance followed*
- Formulated for use in all American, Asian, and European automobiles
- Features a patented non 2-EH formula that is phosphate-free and silicate-free
- Can be used to top-off any color of automobile antifreeze including green, yellow, orange, fuschia, blue and red
- Amber color will not change the current antifreeze color when used for topping off
- Meets ASTM D-3306 + ASTM D-4340
- Prediluted Ready Use formula for topping off

SPECIFICATIONS:

- ANFOR R 15-601
- BS 6580 (British Standard)
- Chrysler MS7170
- Chrysler MS9769
- Ford ESE-M97B44-A
- Ford WSS-M97B51-A1
- FVV HEFT R443 (Germany)
- GM 6277M (DEX-COOL® Spec)
- JASO M325 (Japan)
- JIS K 2234 (Japan)
- SAE J1034
- Mercedes Benz DBL 7700

Properties

Specific Gravity 60/60°F
Boiling Point, Reflux
Foam Test**
pH, 50% Volume Solution
Flash Point, COC
Total Water, Wt. %
Total Glycols, Wt. %
Color

Typical Values

1.070-1.080
265°F Min.*
50 ml./3 sec. Max.
7.5-10.0
250°F Min.
50% Min.
50% Max.
Amber

ASTM Test Method

D-1122
D-1120
D-1881
D-1287
D-92
D-1123
D-202

Protection Chart (°F)

*Using a 15 psi pressure cap

Concentration	50%
Boiling Point*	265°F
Freezing Point	-34°F

*At sea level atmospheric pressure with 15lb. pressure cap. The boiling point decreases about 2°F per 1,000 feet of altitude and increases about 2.5°F per pound developed in the system.

Part Number	PXAB53	Cases Per Pallet	36
Gallon UPC	0-74804-00243-0	Pallets/Cases per Truck	20/720
Case UPC	0-74804-10243-7	Units per Truck	4,320
Case SCC-14	1-00-74804-00243-7	Truckload Weight***	42,040lbs.
Pack/Unit Case	6/1 Gallon (3.78 Liters)	Pallet Size	48”L x 40”W x 53 ³ / ₄ ”H
Weight/Cube	57 lbs./1.53 cu. ft.	Pallet Weight (inc. A/F & pallet)	2,102 lbs.
Case Dimentions	15 ¹ / ₂ ”L X 12 ¹ / ₂ ”W X 12”H	Cases/Rows High	9/4

(*) Includes Pallet Wt.: 20 @ 50 lbs. ea. = 1,000 lbs. Product Liability Information/Material Safety Data available upon request.


PEAK



PERFORMANCE WITHOUT COMPROMISE

At PEAK, we're the independent guys, running a family owned business that's nothing like Big Oil. Here, American made quality and value go into good, honest products, with everything your engine needs to run right for the long haul.

CHECK OUT
OUR OTHER
TRUSTED
PRODUCTS

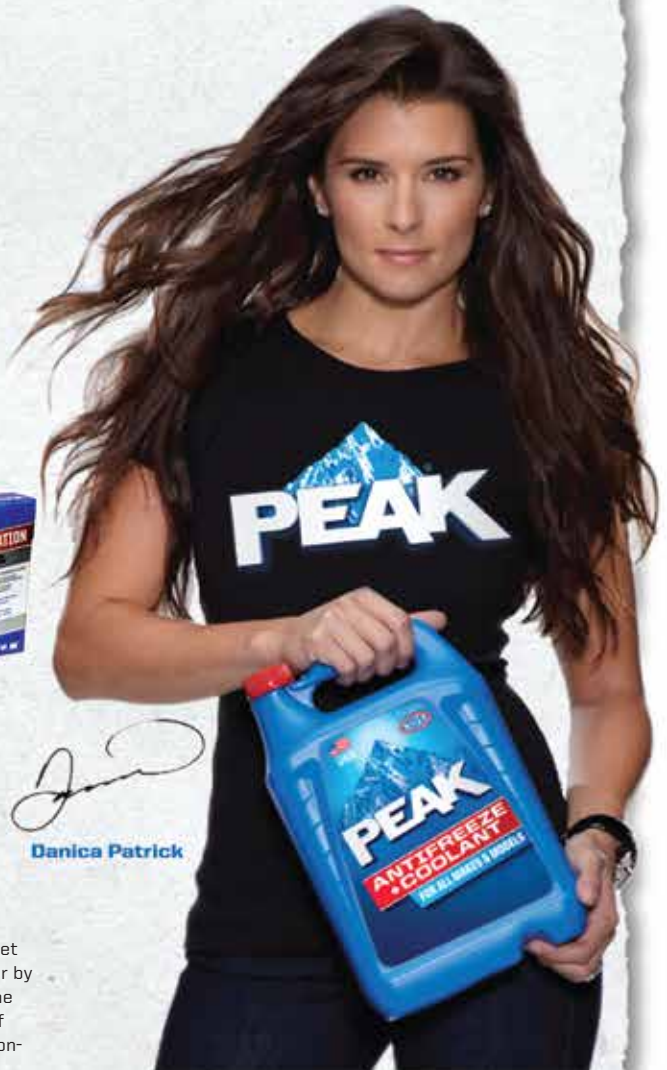


Danica Patrick



Connect with PEAK



PEAKAUTO

WWW.PEAKAUTO.COM

HANDLING AND SAFETY INFORMATION Refer to Old World Industries Material Safety Data Sheet (MSDS). The MSDS is available from your PEAK Performance Supplier at www.peakauto.com, or by calling Old World Industries' PEAK technical support line at 1-800-477-5847. We Only Have One World...Please Help Protect It. All laws and regulations should be observed when disposing of Antifreeze/Coolant and Radiator Fluids. Call the EPA or the office of your state or local environmental agency for details on disposal procedures.



We Support
Be Car Care Aware
www.carcare.org

Distributed by Old World Industries, LLC Northbrook, IL 60062
p 800.323.5440 www.peakauto.com
©2013 PEAK and the PEAK Mountain Graphic are Registered Trademarks of Old World Industries, LLC.
Long Life is a registered trademark of the Warren Distribution

RUN TRUE™